




Filler  
Masterbatches



Global Colors

# Advanced Filler Masterbatches

Kritilen® Filler masterbatches are concentrates of Calcium Carbonate (CaCO<sub>3</sub>) or Talc in a polymer base. They offer a convenient, clean way of incorporating CaCO<sub>3</sub> and Talc into thermoplastics, without contamination by dust. With perfect dispersion and optimized flow properties, they ensure easy and efficient processing.

In addition, Kritilen® Filler masterbatches stand out as a more sustainable solution, lowering the polymer usage in the end application.

## Food Approval

Kritilen® Filler masterbatches are approved for food contact (unless otherwise specified).

## Applications

Kritilen® Filler masterbatches are used in injection, blow-moulding, film, sheet and tapes applications. They offer the following advantages.

### a) Injection & blow-moulding

- Lower raw materials cost, as they are usually more economic than polymer resins.
- Increased output due to faster mould cooling.
- Reduction of color masterbatch requirement.
- Higher resistance to heat deflection, higher rigidity and stiffness.
- Improved dimensional stability, weldability and printability.

Addition rate of FILLER masterbatches in injection & blow-moulding applications can be up to 50%, however, most usual levels are between 5-30%.

### b) Film, sheet, sacks, bags

- Lower raw materials cost, as they are usually more economic than polymer resins.
- Reduction of color masterbatch requirement.
- Higher stiffness, paper-like effect.
- Improved weld ability and printability.
- Improved anti-blocking properties.
- Better bubble stability.

Addition rate of FILLER masterbatches in film applications is 2-20%.

CaCO<sub>3</sub> and talc grades used in Kritilen® Filler masterbatches are of excellent quality. Their typical properties are as follows:

Property	CaCO <sub>3</sub>	Talc
Median size (D50), mic.	3,7	5,4
Top Cut (D98), mic.	9,5	20
Hardness (Mohs)	1,5	1
Oil Absorption (gr/100 gr)	14	25



### c) PE & PP tapes

- Anti fibrillation (also known as anti splitting).
- Lower raw materials cost, as they are usually more economic than polymer resins.
- Reduced need of pigmentation.
- Higher final product stiffness.
- Improved weld ability and printability.
- Improved anti-blocking properties.
- Improved weaving ability.
- Easier processing.

Usual addition rate of FILLER masterbatches in tapes is 3-8%. The grades mostly recommended for this application are 575, 580, 585 and PP977. A PE based "anti-splitting" masterbatch adds a certain elasticity to the tape, while a PP based one is more compatible with the polymer. PP977 has been specially designed for this application and has a stricter dispersion specification than PP975 which is a general purpose filler masterbatch.




### d) PS products

Filler PS775 and PS780 are used to add rigidity and reduce cost of PS products. Filler PS7603 contains talc and is used to improve mechanical properties of PS products while it can be also used as nucleating agent in foamed PS sheets.

The information and suggestions contained herein are the result of our experience, knowledge and research. They are believed to be reliable and are given in good faith. However, no warranty is provided, as the conditions under which our products are used are beyond our control.

KRITILEN® FILLER	Base Resin	Filler Type	Filler %
575	PE	CaCO <sub>3</sub>	75
580	PE	CaCO <sub>3</sub>	80
585	PE	CaCO <sub>3</sub>	85
PP975	PP-H	CaCO <sub>3</sub>	75
PP977	PP-H	CaCO <sub>3</sub>	75
PP980	PP-H	CaCO <sub>3</sub>	80
PP985	PP-H	CaCO <sub>3</sub>	85
PS775	PS-GP	CaCO <sub>3</sub>	75
PS780	PS-GP	CaCO <sub>3</sub>	80
552	PE	Talc	50
561	PE	Talc	60
PP956	PP-H	Talc	50
PP960	PP-H	Talc	60
PS7603	PS-GP	Talc	60

Other masterbatches with different type(s)/level(s) of fillers can be produced upon request.

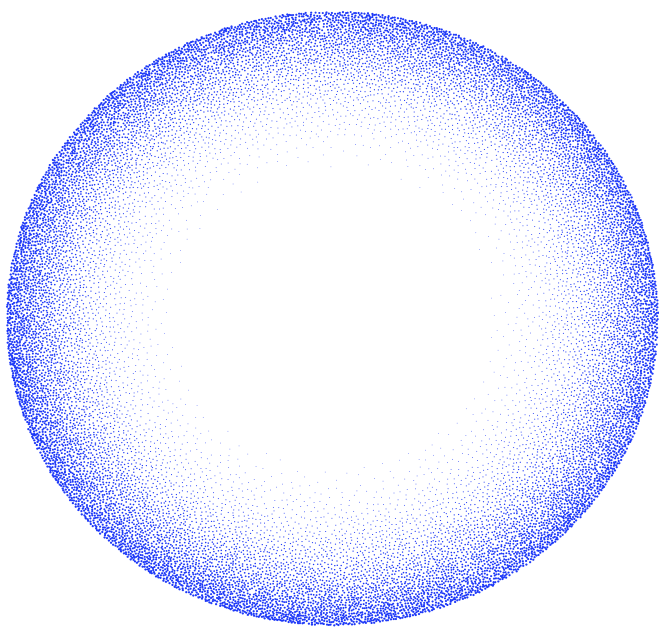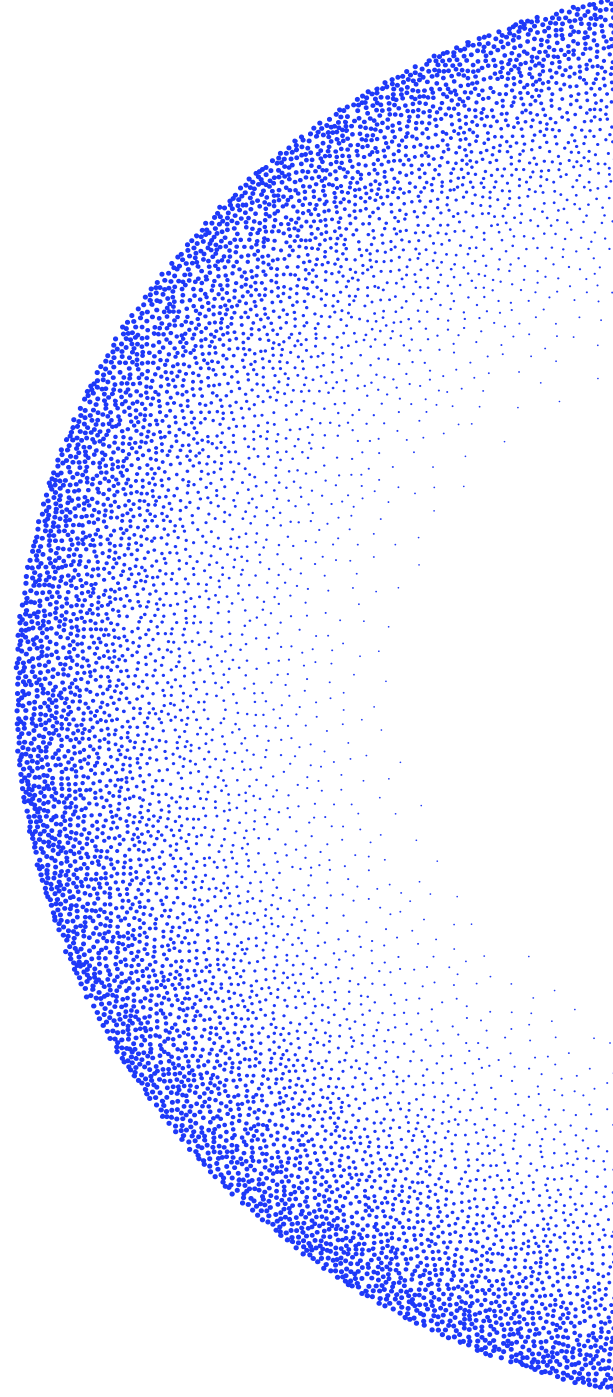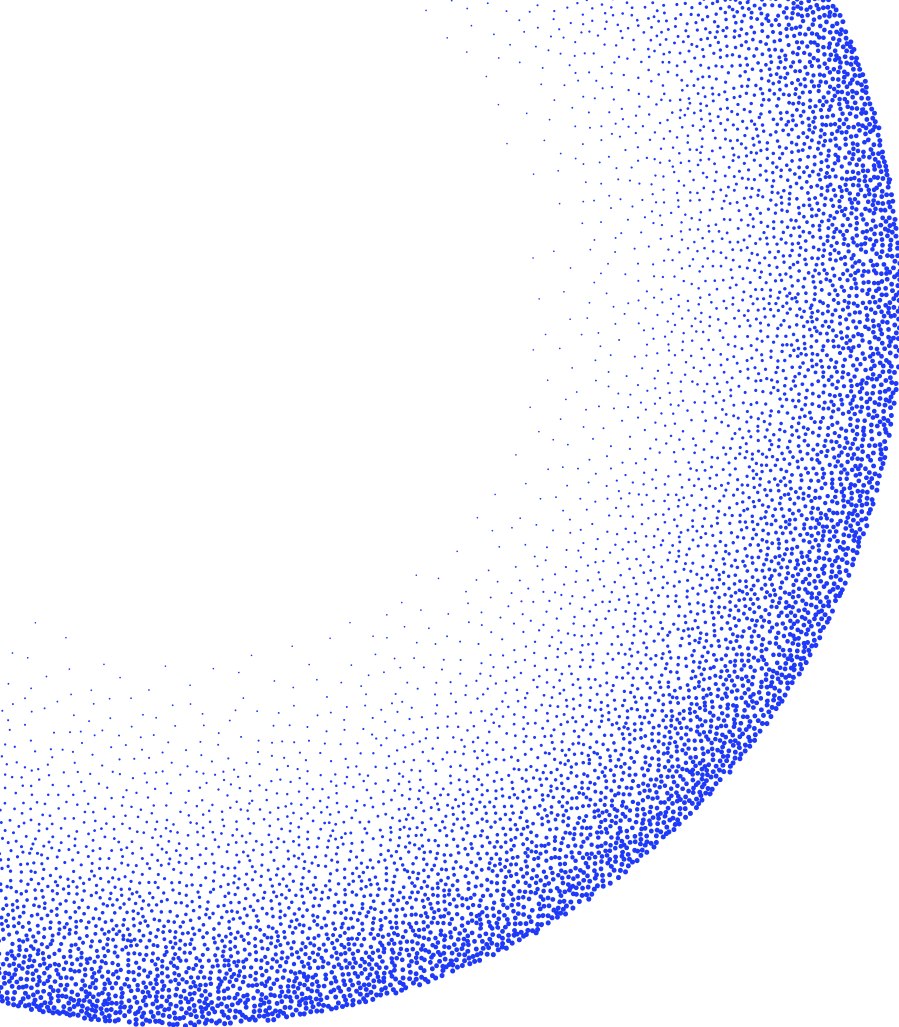

**GLOBALCOLORS.COM**

Member of  
Plastika Kritis

